


Verlegeanleitung CASALoc AQUA PROTECT

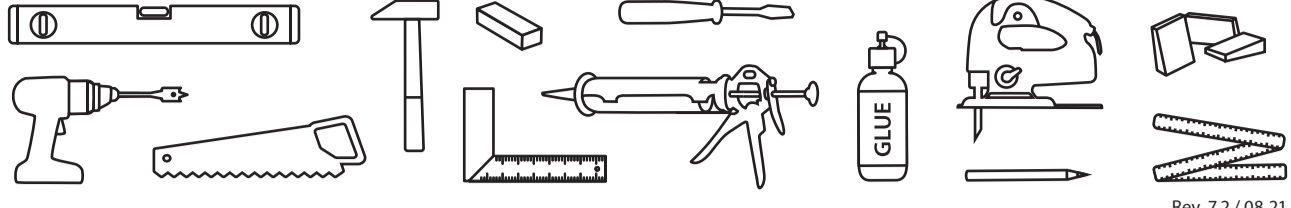

Rev. 7.2 / 08.21

1 rel. hum. 40-60%
temp. >18°C/64°F (48 h)
≥ 30 cm / 12 in

2 CA 0,3 CM % CT 1,8 CM %

3 **4**

5 **6** max. 2 mm / 1 m
5/64 in / 3 ft

7 max. 3 mm, 1/8 in
0,2 mm PE

8 2 cm / 25/32 in
20 cm / 7 7/8 in

9 x=10 mm / 3/8 in

10 max. 29°C / 84°F

11 **12**

13 rel. hum. 40-60%
temp. >18°C/64°F

14

15 > 8 cm / 3 1/8 in
11 m / 36 ft
x=10 mm / 3/8 in

16 **17** ∠ 20-30°

18 **19**

20 **21** > 30 cm / 12 in

22 ø+20 mm / 3/4 in
23 ø+20 mm / 3/4 in

24 V1 > 8 cm / 3 1/8 in
25 V1
26 V1

24 V2 10 mm / 3/8 in
25 V2 +10 mm / 3/8 in
26 V2 > 8 cm / 3 1/8 in

27 **28** **29** 1: PE foam baker rod / PE Schaum Band, 2: Silicone / Silikon, 3: Molding / Leiste

30 **31** **32** **33**

34 **35** 1 2 3